





FA 30 610 15





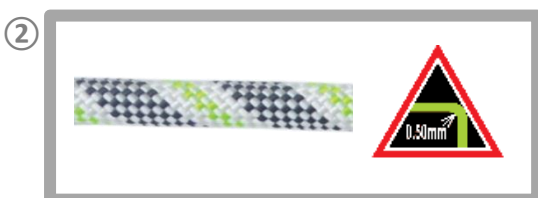


P. 1 | 2

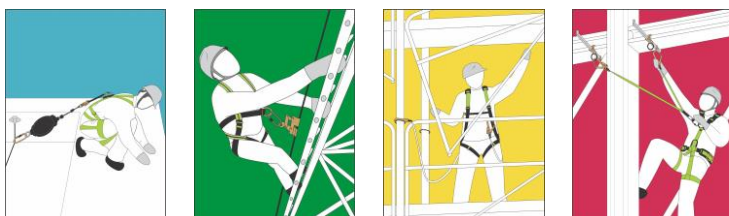gravity-s



HS CODE
56090090
CARTON SIZE / PCS.
80 x 40 x 24 cm / 10
AET N° 2777/10964-01/E06-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland



REF.	FA 30 610 15
LG.  KG	1.5 m (connectors included)  140 KG
CE	EN 355:2002
MAT.	 PA 11 mm Polyamide
	45 mm
	
	YES
+	VG 11.063
	1.65 KG



**Largeur de l'absorbeur d'énergie**  
Width of the energy absorber  
**Ancho del absorbedor de energía**  
Larghezza del assorbitore di energia  
**Breite des Falldämpfers**

**Longueur Poids maxi utilisateur**  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers



**Matière connecteurs**  
Material of connector  
**Material de los conectores**  
Materiale connettori  
**Material Verbinder**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**